

# Clean-Pak™

## High-Efficiency Extended Surface Synthetic Bag Filters

**MERV 12, 15, and 16**



### Micro-fine Synthetic Media High-Efficiency with Low Initial Resistance and Long Service Life

Parker's Clean-Pak™ bag filters provide the best value in medium to high-efficiency filtration. A triple-layer of high-loft 100% synthetic media delivers maximum dirt holding capacity with low resistance. The media is unaffected by moisture or humidity and pocket integrity is maintained through a sealing process that allows air to flow smoothly through the filter. Clean-Pak Series filters are available in a variety of sizes and pocket counts in varying efficiencies.

#### Markets:

- Automotive
- Food processing
- Microelectronics manufacturing
- Data centers
- Commercial office buildings
- Schools and universities
- Clean manufacturing facilities
- Hospitals and healthcare facilities
- Government institutions
- Industrial manufacturing

#### Contact Information:

Parker Hannifin Corporation  
**HVAC Filtration Division**  
100 River Ridge Circle  
Jeffersonville, Indiana 47130

**phone 866 247 4827**

[www.parker.com/HVAC](http://www.parker.com/HVAC)



#### Product Features:

- All pocket edges bonded with a high-integrity, sonic weld seal design
- Triple-layer of high-loft synthetic media
- High-efficiency melt-blown media design
- Fabric ribbon separators welded inside the pockets create aerodynamic channels for smooth air flow and low resistance
- Durable, corrosion-resistant header and pocket retainers



ENGINEERING YOUR SUCCESS.



# Clean-Pak™ Filters Extended Surface Bag Filter

## Specifications

Nominal Size (H x W x D) Inches	Actual Size (H x W x D) (Inches)	# of Pockets	Rated Air Velocity (FPM)	Rated Air Flow (CFM)	CP-M16 MERV 16	CP-M15 MERV 15	CP-M12 MERV 12	Media Area (Square Feet)
24 x 24 x 36	23-3/8 x 23-3/8 x 36	08	500	2000	0.36	0.46	0.33	105
24 x 24 x 36	23-3/8 x 23-3/8 x 36	06	500	2000	0.35	0.45	0.32	82
24 x 24 x 29	23-3/8 x 23-3/8 x 29	10	500	2000	0.30	0.38	0.27	107
24 x 24 x 29	23-3/8 x 23-3/8 x 29	08	500	2000	0.33	0.42	0.30	88
24 x 24 x 29	23-3/8 x 23-3/8 x 29	06	500	2000	0.35	0.45	0.32	68
24 x 24 x 22	23-3/8 x 23-3/8 x 22	10	500	2000	0.33	0.42	0.30	79
24 x 24 x 22	23-3/8 x 23-3/8 x 22	08	500	2000	0.35	0.45	0.32	64
24 x 24 x 22	23-3/8 x 23-3/8 x 22	06	500	2000	0.37	0.47	0.34	50
24 x 24 x 18	23-3/8 x 23-3/8 x 18	10	500	2000	0.46	0.58	0.41	64
24 x 24 x 18	23-3/8 x 23-3/8 x 18	08	500	2000	0.47	0.60	0.43	53
24 x 24 x 18	23-3/8 x 23-3/8 x 18	06	500	2000	0.61	0.78	0.56	41
24 x 24 x 15	23-3/8 x 23-3/8 x 15	10	500	2000	0.59	0.75	0.54	54
24 x 24 x 15	23-3/8 x 23-3/8 x 15	08	500	2000	0.54	0.69	0.49	44
24 x 24 x 15	23-3/8 x 23-3/8 x 15	06	500	2000	0.63	0.80	0.57	34
24 x 24 x 12	23-3/8 x 23-3/8 x 12	10	500	2000	0.53	0.67	0.48	43
24 x 24 x 12	23-3/8 x 23-3/8 x 12	08	500	2000	0.63	0.80	0.57	35
24 x 24 x 12	23-3/8 x 23-3/8 x 12	06	500	2000	0.67	0.85	0.61	27
24 x 20 x 22	23-3/8 x 19-3/8 x 22	05	500	1670	0.53	0.67	0.48	42
24 x 12 x 36	23-3/8 x 11-3/8 x 36	04	500	1000	0.35	0.44	0.31	52
24 x 12 x 29	23-3/8 x 11-3/8 x 29	04	500	1000	0.28	0.36	0.26	44
24 x 12 x 22	23-3/8 x 11-3/8 x 22	04	500	1000	0.31	0.40	0.29	32
24 x 12 x 22	23-3/8 x 11-3/8 x 22	03	500	1000	0.53	0.68	0.49	25
24 x 12 x 18	23-3/8 x 11-3/8 x 18	04	500	1000	0.53	0.68	0.49	26
24 x 12 x 15	23-3/8 x 11-3/8 x 15	04	500	1000	0.50	0.63	0.45	22
24 x 12 x 12	23-3/8 x 11-3/8 x 12	04	500	1000	0.61	0.78	0.56	17
20 x 24 x 22	19-3/8 x 23-3/8 x 22	06	500	1670	0.50	0.63	0.45	42
20 x 24 x 18	19-3/8 x 23-3/8 x 18	06	500	1670	0.57	0.72	0.51	35
20 x 20 x 22	19-3/8 x 19-3/8 x 22	06	500	1670	0.31	0.39	0.28	41
20 x 20 x 22	19-3/8 x 19-3/8 x 22	05	500	1670	0.32	0.41	0.29	35
20 x 20 x 12	19-3/8 x 19-3/8 x 12	06	500	1670	0.47	0.60	0.43	22
20 x 20 x 12	19-3/8 x 19-3/8 x 12	05	500	1670	0.51	0.65	0.46	19

### NOTES:

1. Testing per ASHRAE Standard 52.2-2017. Performance based on 492 FPM face velocity for a 24x24x29, 8 pocket filter.
2. Rated face velocity 500 FPM
3. Recommended final resistance 1.50" W.G.
4. Width and height dimensions are not interchangeable. Bag filters must be installed with pockets running vertically.
5. Maximum operating temperature 190°F (88°C)
6. Classified per UL 900 for flammability
7. See *Clean-Pak Ordering Information* sheet for available sizes and options

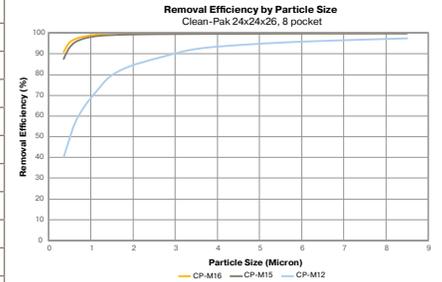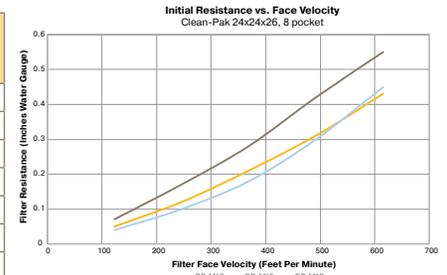

Your Local Authorized Parker Distributor

**WARNING:** This product can expose you to chemicals, including acetaldehyde and nickel which are known to the State of California to cause cancer, and lead and methanol, which are known to the State of California to cause birth defects and other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

